

Technical Specifications

VERSION 2019.07-001





Hybrid 720

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
HYH-72x45	HYN-72x45	720 x 450 mm	5	46 Watts
HYH-72x60	HYN-72x60	720 x 600 mm	5	63 Watts
HYH-72x75	HYN-72x75	720 x 750 mm	5	80 Watts
HYH-72x90	HYN-72x90	720 x 900 mm	5	97 Watts
HYH-72x105	HYN-72x105	720 x 1050 mm	5	113 Watts

NOTES


- This is a Low Voltage product
- Transformer required TRTR220-24V (Sold separately)
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm² Do not exceed 5 meters in length.
- Non Heated version available (Less 10%)
- Plug-In version not available

STANDARD FINISHES

Mirror Polished	Brushed	Matt Black/White	Gunmetal	Brushed Gold
Stainless Steel	Stainless Steel	Painted	PVD	PVD
RRP	+20% (Stocked)	+40% (Stocked)	+50% (Stocked)	+60% (Stocked)

SPECIFICATIONS

Voltage 24 Volts	Standards AS/NZ 60335.2.43	MADE IN AUSTRALIA	
Material	Electrical Connection		
Stainless Steel 304	Concealed Wiring only - any leg (Transformer required)	HEATING TIME 30 MINUTES	
Finish		30 MINO I E3	
Mirror Polished	Heating Method		
	Dry Internal Heating Element		
Ingress Protection IPX5 (Suitable for wet areas)	Non-Heated version available	WARRANTY 10 YEAR	10

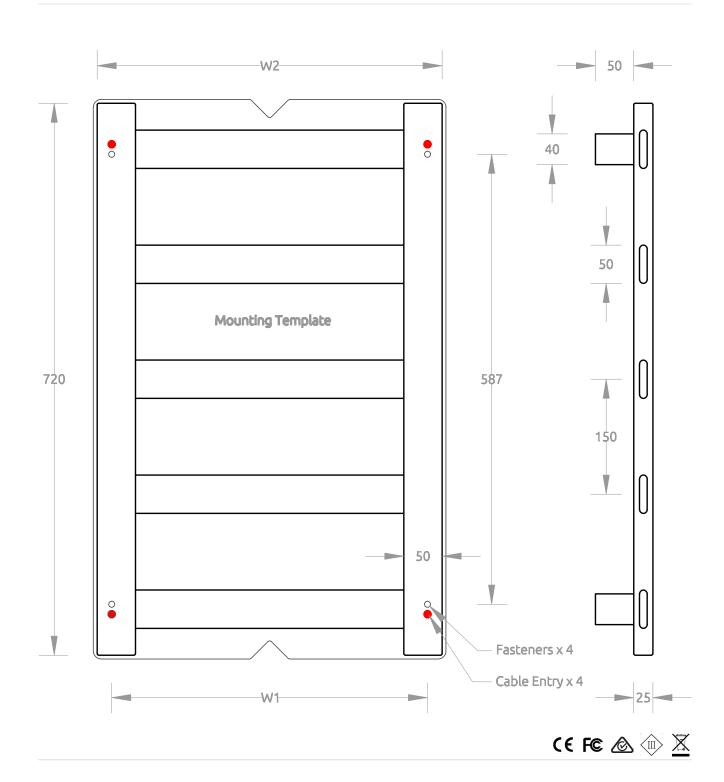

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
HYH-72x45	HYN-72x45	412mm	450mm
HYH-72x60	HYN-72x60	562mm	600mm
HYH-72x75	HYN-72x75	712mm	750mm
HYH-72x90	HYN-72x90	862mm	900mm
HYH-72x105	HYN-72x105	1012mm	1050mm